

stored energy solutions for a demanding world



Model: **40PzV 200**

Ares series

Ares range battery adopts traditional tubular gel technology, adopts patent gel electrolyte. The products are used as standby power for communication, power, military and broadcast and television system. They possess precise ABS heat seal technology between container and lid and patented post seal structure. Provide better deep cycle performance versus AGM. The design float life is 18+ years.



Specifications

Battery Model	40PzV 200
Nominal Voltage	2V
Rated Capacity	200Ah (10hour rate) to 1.80V/cell @25°C(77°F)
Typical Weight	20kg
Internal Resistance	Approx 0.939mΩ
Operating Temperature Range	Operation (maximum): -40°C to 55°C(-40°F to 131°F)
	Operation (recommended): 15°C to 25°C(59°F to 77°F)
	Storage: -20°C to 40°C(-4°F to 104°F)
Float Voltage	2.23V/cell@25°C(77°F)
Charge Current	20A(Recommendation) 50A(Maxmum)
Equalize and Cycle Service	2.35V~2.40V/cell@25°C(77°F)
Self Discharge	The residual capacity is above 94% after 90 days storage(25°C/77°F)
Terminal	M8 Female Large Size Copper Post
Terminal Hardware Torque	15 ± 1.0Nm
Container Material	ABS (V0 optional)

Discharge Data with Constant Current Units : Amperes (25°C, 77°F)

End voltage	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	16h	24h	48h	100h
1.60V	219	175	120	74	54	43	36.5	32.1	25.9	21.2	13.7	9.5	5.2	2.9
1.65V	212	169	117	73	53	42	36.1	31.7	25.7	21.1	13.6	9.5	5.2	2.9
1.70V	199	162	114	71	52	42	35.6	31.2	25.4	21.0	13.5	9.4	5.1	2.8
1.75V	189	156	110	69	51	41	35	30.6	24.9	20.7	13.4	9.2	5.1	2.8
1.80V	167	143	105	67	50	40	34.2	29.8	24.3	20.1	13.0	9.0	5.0	2.7
1.85V	140	120	98	63	48	39	33.1	28.8	23.6	19.8	12.8	8.7	4.7	2.6
1.90V	106	103	78	55	43	36	30.8	26.6	21.4	17.8	11.5	8.0	4.4	2.4

Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)

End voltage	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	16h	24h
1.60V	439	347	266	146	111	88	74.1	64.8	53.2	44.7	28.8	19.6
1.65V	418	329	247	145	110	88	73.6	63.4	52.9	44.4	28.6	19.4
1.70V	399	314	232	143	109	86	72.6	62.5	52.2	43.8	28.3	19.2
1.75V	377	301	218	139	106	83	70.0	61.6	51.3	43.0	27.7	18.9
1.80V	353	289	206	134	103	81	66.8	58.5	48.9	40.8	26.3	17.9
1.85V	330	278	191	129	98	77	65.0	56.0	46.4	39.1	25.2	17.2
1.90V	309	254	170	117	95	74	63.3	51.0	42.2	35.5	22.9	15.6






stored energy solutions for a demanding world

NARADA

Model: **40PzV 200**

Ares series

Dimensions—mm [inch]

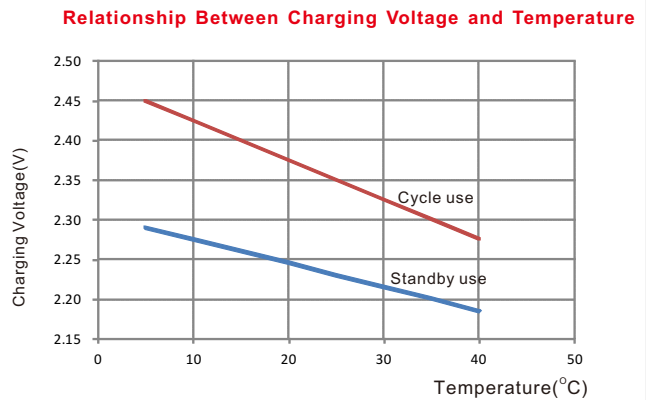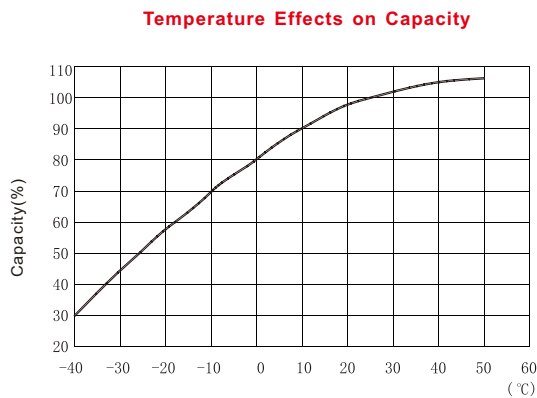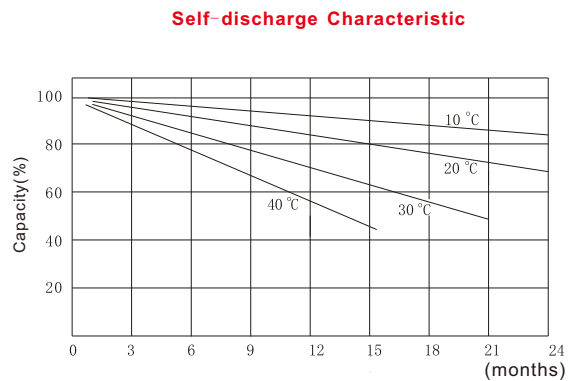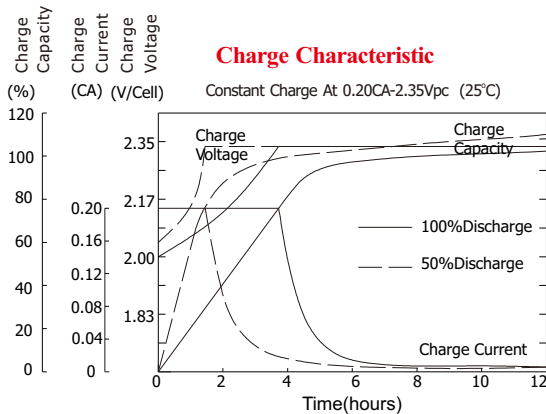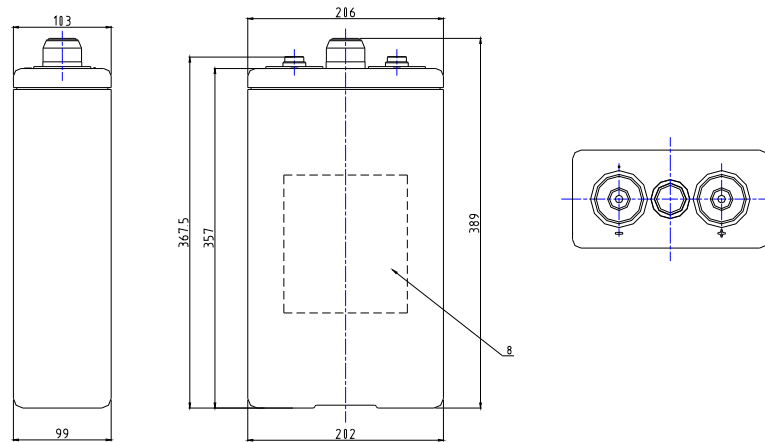

NARADA POWER SOURCE CO.,LTD.
 9F, Building A, No. 50 Zijinghua Road, Hangzhou, China
 Tel:+86-571-28827013 Fax:+86-571-28828290
 Website:www.naradabattery.com E-mail: intl@narada.biz

NARADA ASIA PACIFIC PTE.LTD.
 65 Ubi Crescent #07-05 HOLA centre, Singapore
 Tel: +65-6848 1191 Fax: +65-6749 3498
 E-mail: sales@narada.com.sg

NARADA EUROPE (UK) LIMITED
 Spectrum House, Dunstable Road, Redbourn,
 St. Albans, Herts AL3 7PR
 Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031
 E-mail: sales@naradaeurope.com

